

Jenkins

- description : jenkins
- author :
- email : hylee@repia.com
- lastupdate : 2020-06-10

Jenkins

Jenkins ?

- (Jenkins) (CI : continuous integration)
- .
- Git 가 .
- CI/CD (SpotBugs, ...) 가
- .

1.

Jenkins download

Past Releases


Tip : ex) 2.50, 2.100 2.100 . (가)
 Tip : jenkins 2.54 8 .



2.


```
vi /home/search/.jenkins/secrets/initialAdminPassword
```

Administrator password

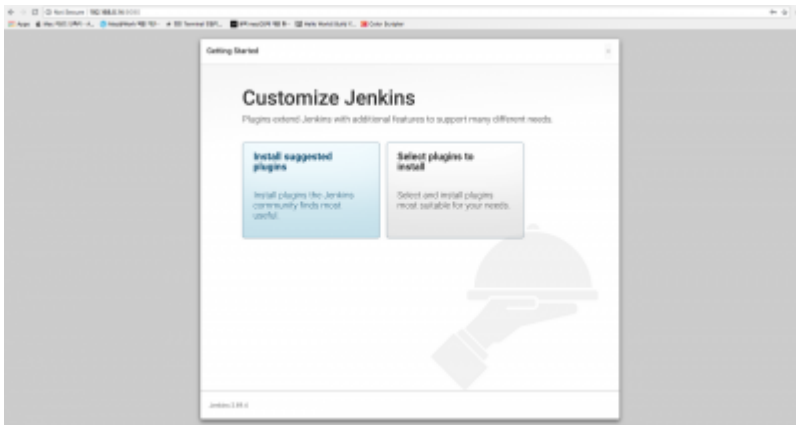

suggested

Tip :

false

jenkins

4. (svn + war)



Jenkins >

새로운 Item

사람

빌드 기록

Jenkins 관리

Credentials

Terminal

New View

빌드 대기 목록

빌드 대기 항목이 없습니다.


빌드 실행 상태

- 1 대기 중
- 2 대기 중

Item


The screenshot shows the Jenkins 'New Item' page. At the top, there is a search bar and a 'Jenkins' logo. Below that, there is a section titled 'Enter an Item name' with a text input field. Underneath, there is a list of item types: Freestyle project, Pipeline, External Job, Multi-configuration project, Folder, GitHub Organization, and Multibranch Pipeline. The 'Freestyle project' option is highlighted with a red box. Below the list, there is a section titled 'If you want to create a new item from other existing, you can use this option' with a 'Copy from' field and a 'Type to autocomplete' text.

Item name Freestyle project

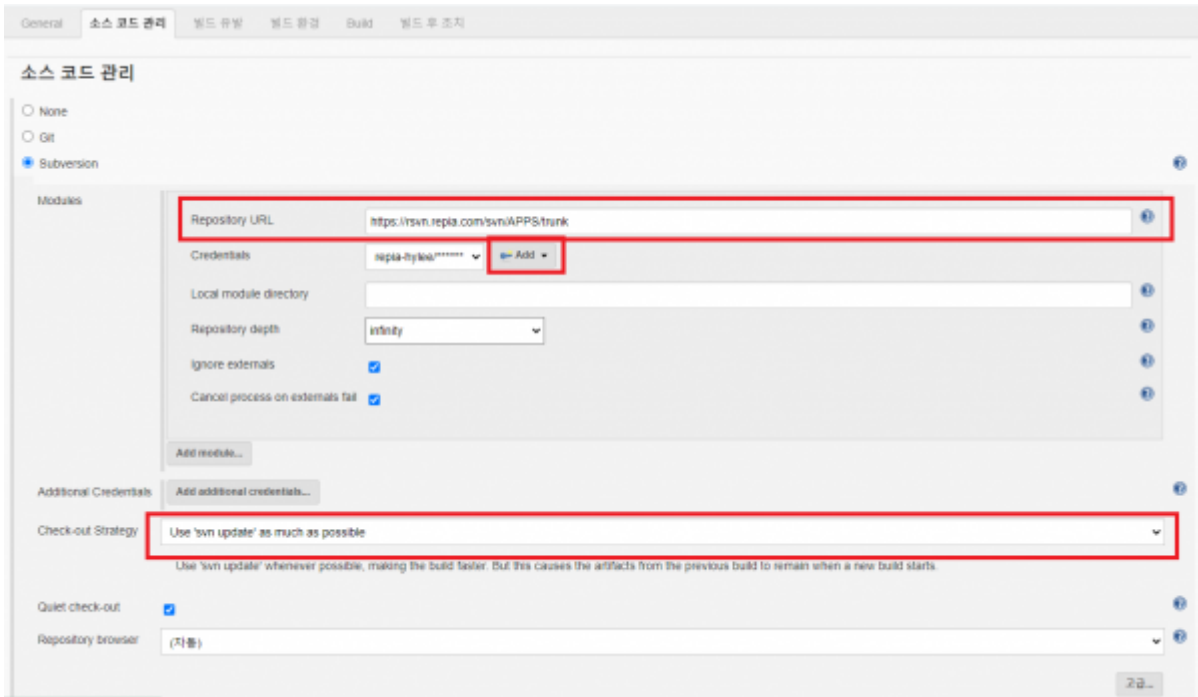

Credentials Add
 Tip : Repository URL Apps Url (eclips Url) /trunk

Jenkins > Jenkins > Global Tool Configuration 가 maven

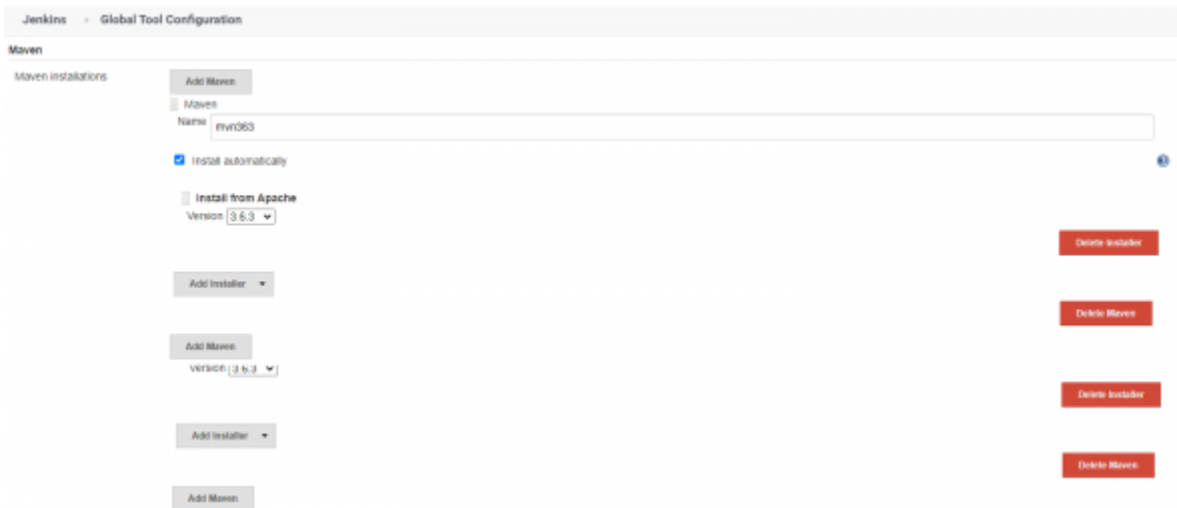

Item



Maven Version :
 Goals : clean install

5.

5-1. jenkins

4. Add build step Execute shell Command가

jenkins
.war .sh

.war

5-2. jenkins

5.1 jenkins

Send build artifacts over SSH

Send build artifacts over SSH가 Publish Over SSH Plugin

Plugin 가 Jenkins > 가 SSH Servers가

.(Apps)

SSH Servers

- SSH Server Name: apps.repla.com
- Hostname: 192.168.10.117
- Username: www
- Remote Directory: /NAS_APPS/tomcat-instance/apps.repla.com/webapps/ROOT
- Use password authentication, or use a different key
- Passphrase / Password: Concealed [Change Password]
- Path to key: []
- Key: []
- Jump host: []
- Port: 10202
- Timeout (ms): 300000
- Disable exec:
- Proxy type: []
- Proxy host: []

Item

빌드 후 조치

Send build artifacts over SSH

- SSH Publishers
- SSH Server Name: apps.repla.com
- Transfers
- Transfer Set
- Source files: **/*.war
- Remove prefix: */stuck/target
- Remote directory: []
- Exec command: /NAS_APPS/tomcat-instance/apps.repla.com/deploy/jenkins_deploy.sh apps-1.0.0.war
- All of the transfer fields (except for Exec timeout) support substitution of [Jenkins environment variables](#)

```
Remove prejix :          ROOT          ROOT/trunk/target/apps-1.0.0.war가 .
Exec command :          bash          .
```

Tip

Troubleshooting

Ref

- [CentOS 7 Jenkins](#) ::
 - [Jenkins](#) 가
 - [CentOS 6 Jenkins](#) SVN + Spring Maven
 - [CI -](#) (SSH)
 - [\(Jenkins\)](#) (Remote)
 - [Cannot run program "mvn" error=2, No such file or directory](#)
- , jenkins

From:
<http://125.132.25.164/dokuwiki/> -
 2023.12

Permanent link:
<http://125.132.25.164/dokuwiki/doku.php?id=wiki:3party:jenkins&rev=1669943945>

Last update: **2022/12/02 10:19**

