

# jQuery

- description : jQuery
- author :
- email : dhan@repia.com
- lastupdate : 2020-03-18

jquery onclick

## Ajax

[jquery] , \$.ajax() .

## Button

가

```

<!doctype html>
<html lang="ko">
  <head>
    <meta charset="utf-8">
    <title>button Test</title>
    <script src="http://code.jquery.com/jquery-1.10.1.min.js"></script>
    <script>
      $( document ).ready( function() {
        $("#button").click(function(){
          alert($(this).attr('value'));
        });
      });
    </script>
  </head>
  <body>
    <button id="button" value="huskdoll" ></button>
  </body>
</html>

```

\$(this).attr('value', \${value});

jQuery 가

# Click

How to remove "onclick" with JQuery

```
// Old Way(pre-1.7)
$(selector).attr("onclick", "").unbind("click");
// New Way(1.7+)
$(selector).prop("onclick", null).off("click");
```


[Official docs .click\(\)](#)

# Closest(), parents()

[jQuery closest\(\), parents\(\)](#)

# DatePicker

DatePicker jQuery widget , UI widget

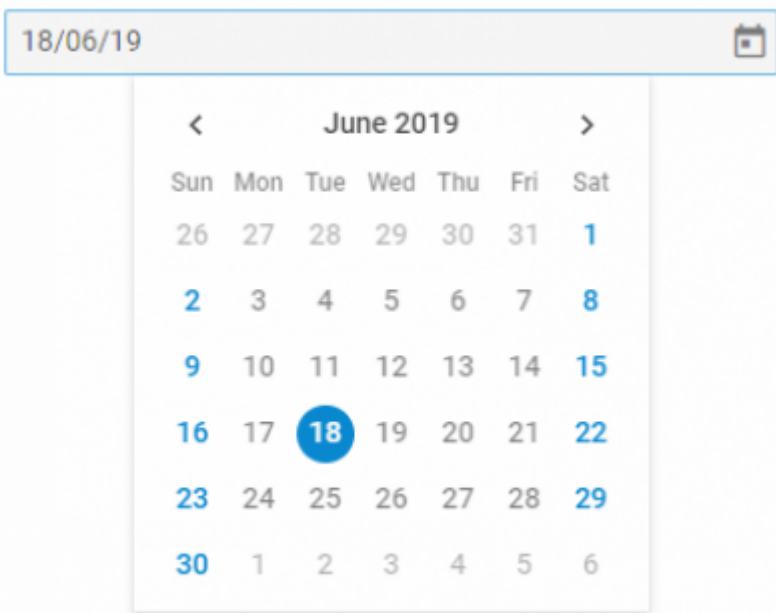

(DatePicker  
3가 File import  
)

```
// jQuery UI CSS
<link rel="stylesheet"
href="http://code.jquery.com/ui/1.8.18/themes/base/jquery-ui.css"
type="text/css" />
// jQuery js
<script
src="http://ajax.googleapis.com/ajax/libs/jquery/1.7.1/jquery.min.js"></scri
pt>
```

```
// jQuery UI      js
<script src="http://code.jquery.com/ui/1.8.18/jquery-ui.min.js"></script>
```

DatePicker

```
$(function() {
  $( "#testDatepicker" ).datepicker({
    buttonImage: "button.png", //
    buttonImageOnly: true      //
  });
});
```

DatePicker      가      Option

[DatePicker](#)

## Each

jQuery - each()      \$.each(object, function(index, item){});  
length      index

```
var obj = {
  daum: 'http://www.daum.net'
  , naver: 'http://www.naver.com'
};
$.each(obj, function(index, item){
  var result = '';
  result += index + ' : ' + item;
  console.log(result);
})
```

```
daum : http://www.daum.net
naver : http://www.naver.com
```

\$(selector).each(function(index, item){});

```
<ul class="list">
  <li>Lorem ipsum dolor sit amet.</li>
  <li>Lorem ior sit amet.</li>
  <li>Lorem ipsum </li>
</ul>

$('.list li').each(function(idex, item){
  $(item).addClass('li_0' + index);
  // or
  $(this).addClass('li_0' + index);
});
```

continue, break

[jQuery each loop](#)                      [continue, break](#)

[jQuery API](#)                      -                      [, each\(\)](#)

## Format

[In jQuery, what's the best way of formatting a number to 2 decimal places?](#)

```
<script type="text/javascript">

  // mini jQuery plugin that formats to two decimal places
  (function($) {
    $.fn.currencyFormat = function() {
      this.each( function( i ) {
        $(this).change( function( e ){
          if( isNaN( parseFloat( this.value ) ) ) return;
          this.value = parseFloat(this.value).toFixed(2);
        });
      });
      return this; //for chaining
    }
  })( jQuery );

  // apply the currencyFormat behaviour to elements with 'currency' as
  their class
  $( function() {
    $('<span>.currency</span>').currencyFormat();
  });

</script>
<input type="text" name="one" class="currency"><br>
<input type="text" name="two" class="currency">
```

## Json

[\[JavaScript\] JSON](#)

## Map function for objects (instead of arrays)

```
myObject = { 'a':1, 'b':2, 'c':3 };
newObject = myObject.map(function (value, label) {
```

```
    return value*value;
  });

// newObject is now { 'a':1, 'b':4, 'c':9 }
```

## Radio

[jQuery select, radio disabled](#)

How to reset radiobuttons in jQuery so that none is checked

```
Old Way(pre-1.6)
$('#input[name="{name}"]').attr('checked', false);
New War(1.6+)
$('#input[name="{name}"]').prop('checked', false);
```

<https://stackoverflow.com/questions/977137/how-to-reset-radiobuttons-in-jquery-so-that-none-is-checked>

Validate radio buttons

```
var valid = false;
$('#formName').find(':input:radio').each(function(){
    if($(this).prop('checked'))
        valid = true;
});

if(!valid)
    return false;
```

[Validate radio buttons with jquery?](#)

[jQuery]

"readonly" "disabled"

## String

Converting a value to string in javascript

```
1. value.toString()
2. "" + value
3. String(value)
```

<https://2ality.com/2012/03/converting-to-string.html>

## Select

text

```
var selected_text = '111111';
$("#S option").filter(function() { return (this.text==selected_text);
}).attr('selected', true);
```

[select box](#)      [text](#)

## Plugin

- [jtree](#)
- [jQuery-UI](#)

## Tip

- [form submit](#)    [input value](#)
- 
- [\(TR\)](#)
- [가](#)
- 
- [selector \(fast.jsoup\)](#)
- 

## Troubleshooting

## Ref

\* [jQuery](#) ,

## jQuery Note

- [jquery\\_note](#)

## jquery                      html 가

```
$('#selector').wrap("<div/>").parent().html(); // div가
$('#selector').parent().html(); //
```

,                      , [eleven](#), [jquery](#)

From:  
<http://125.132.25.164/dokuwiki/> -  
2023.12

Permanent link:  
<http://125.132.25.164/dokuwiki/doku.php?id=wiki:javascript:jquery&rev=1657106355>

Last update: **2022/07/06 20:19**

