

Sass Tutorial

- description : Sass Variables
- author :
- email : shlim@repia.com
- lastupdate : 2021-04-08

Ref

[Sass Variables](#)

Sass Variables

Sass

- strings ()
- numbers ()
- colors ()
- booleans ()
- lists ()
- nulls

Sass \$:

Sass (Variable Syntax):

```
$variablename: value;
```

myFont, myColor, myFontSize myWidth 4


SCSS Syntax

```
$myFont: Helvetica, sans-serif;
$myColor: red;
$myFontSize: 18px;
$myWidth: 680px;
```

```
body {
  font-family: $myFont;
  font-size: $myFontSize;
  color: $myColor;
}

#container {
  width: $myWidth;
}
```

Scout-App scss css

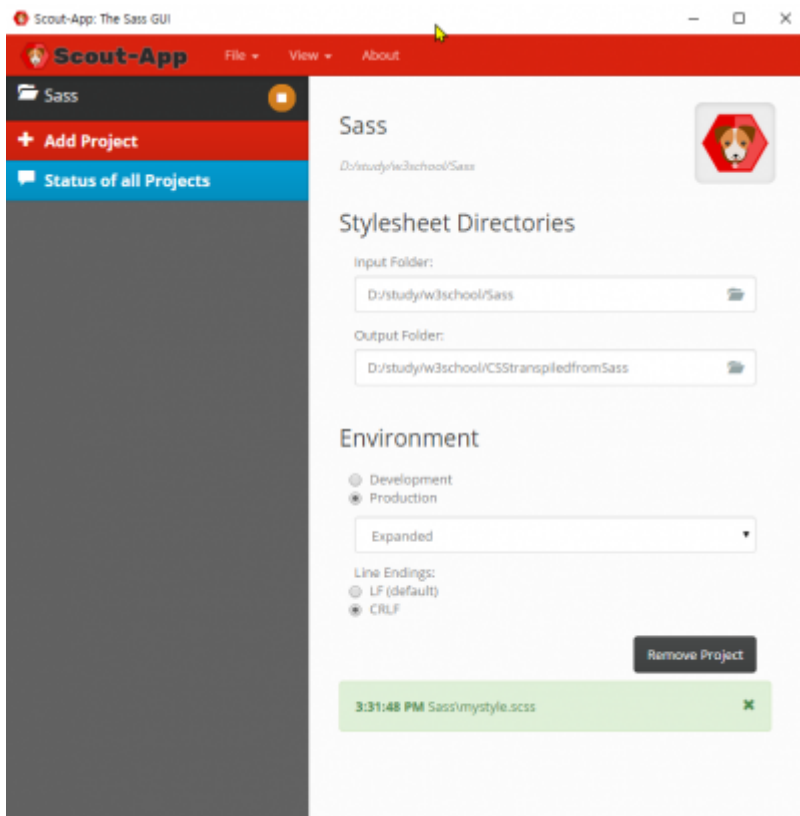

Scout-App mystyle.scss mystyle.css

, Sass (myFont, myColor) 가 CSS CSS

```
body {
  font-family: Helvetica, sans-serif;
  font-size: 18px;
  color: red;
}

#container {
  width: 680px;
  border: 2px blue double;
}
```

```
}
```

html

```

<!DOCTYPE html>
<html>
<link rel="stylesheet" href="mystyle.css">
<body>
  <h1>Hello World</h1>
  <p>This is a paragraph.</p>
  <div id="container">This is some text inside a container</div>
</body>
</html>

```

Sass Variable Scope

Sass

```

$myColor: red;

h1 {
  $myColor: green;
  color: $myColor;
}

p {
  color: $myColor
}

```

<p>

?

!

\$ myColor: green; <h1>

!

CSS

```

h1 {
  color: green;
}

p {
  color: red;
}

```

(scope)

Using Sass !global

```
!global $myColor, $fontSize;
!global $color (global) $fontSize (global);
!global $color ($color global $fontSize);
```

SCSS Syntax

```
$myColor: crimson;

h1 {
  $myColor: green !global;
  color: $myColor;
}

p {
  color: $myColor;
}
```

<p> !
, CSS

CSS Output

```
h1 {
  color: green;
}

p {
  color: green;
}
```

Tip:

(Global Variables)

```
"_globals.scss"
@include
```

., [Sass, Variables](#)

From:
<http://125.132.25.164/dokuwiki/> -

. - 2023.12

Permanent link:
http://125.132.25.164/dokuwiki/doku.php?id=wiki:sass:sass_variables&rev=1617867915

Last update: **2022/03/10 19:52**

